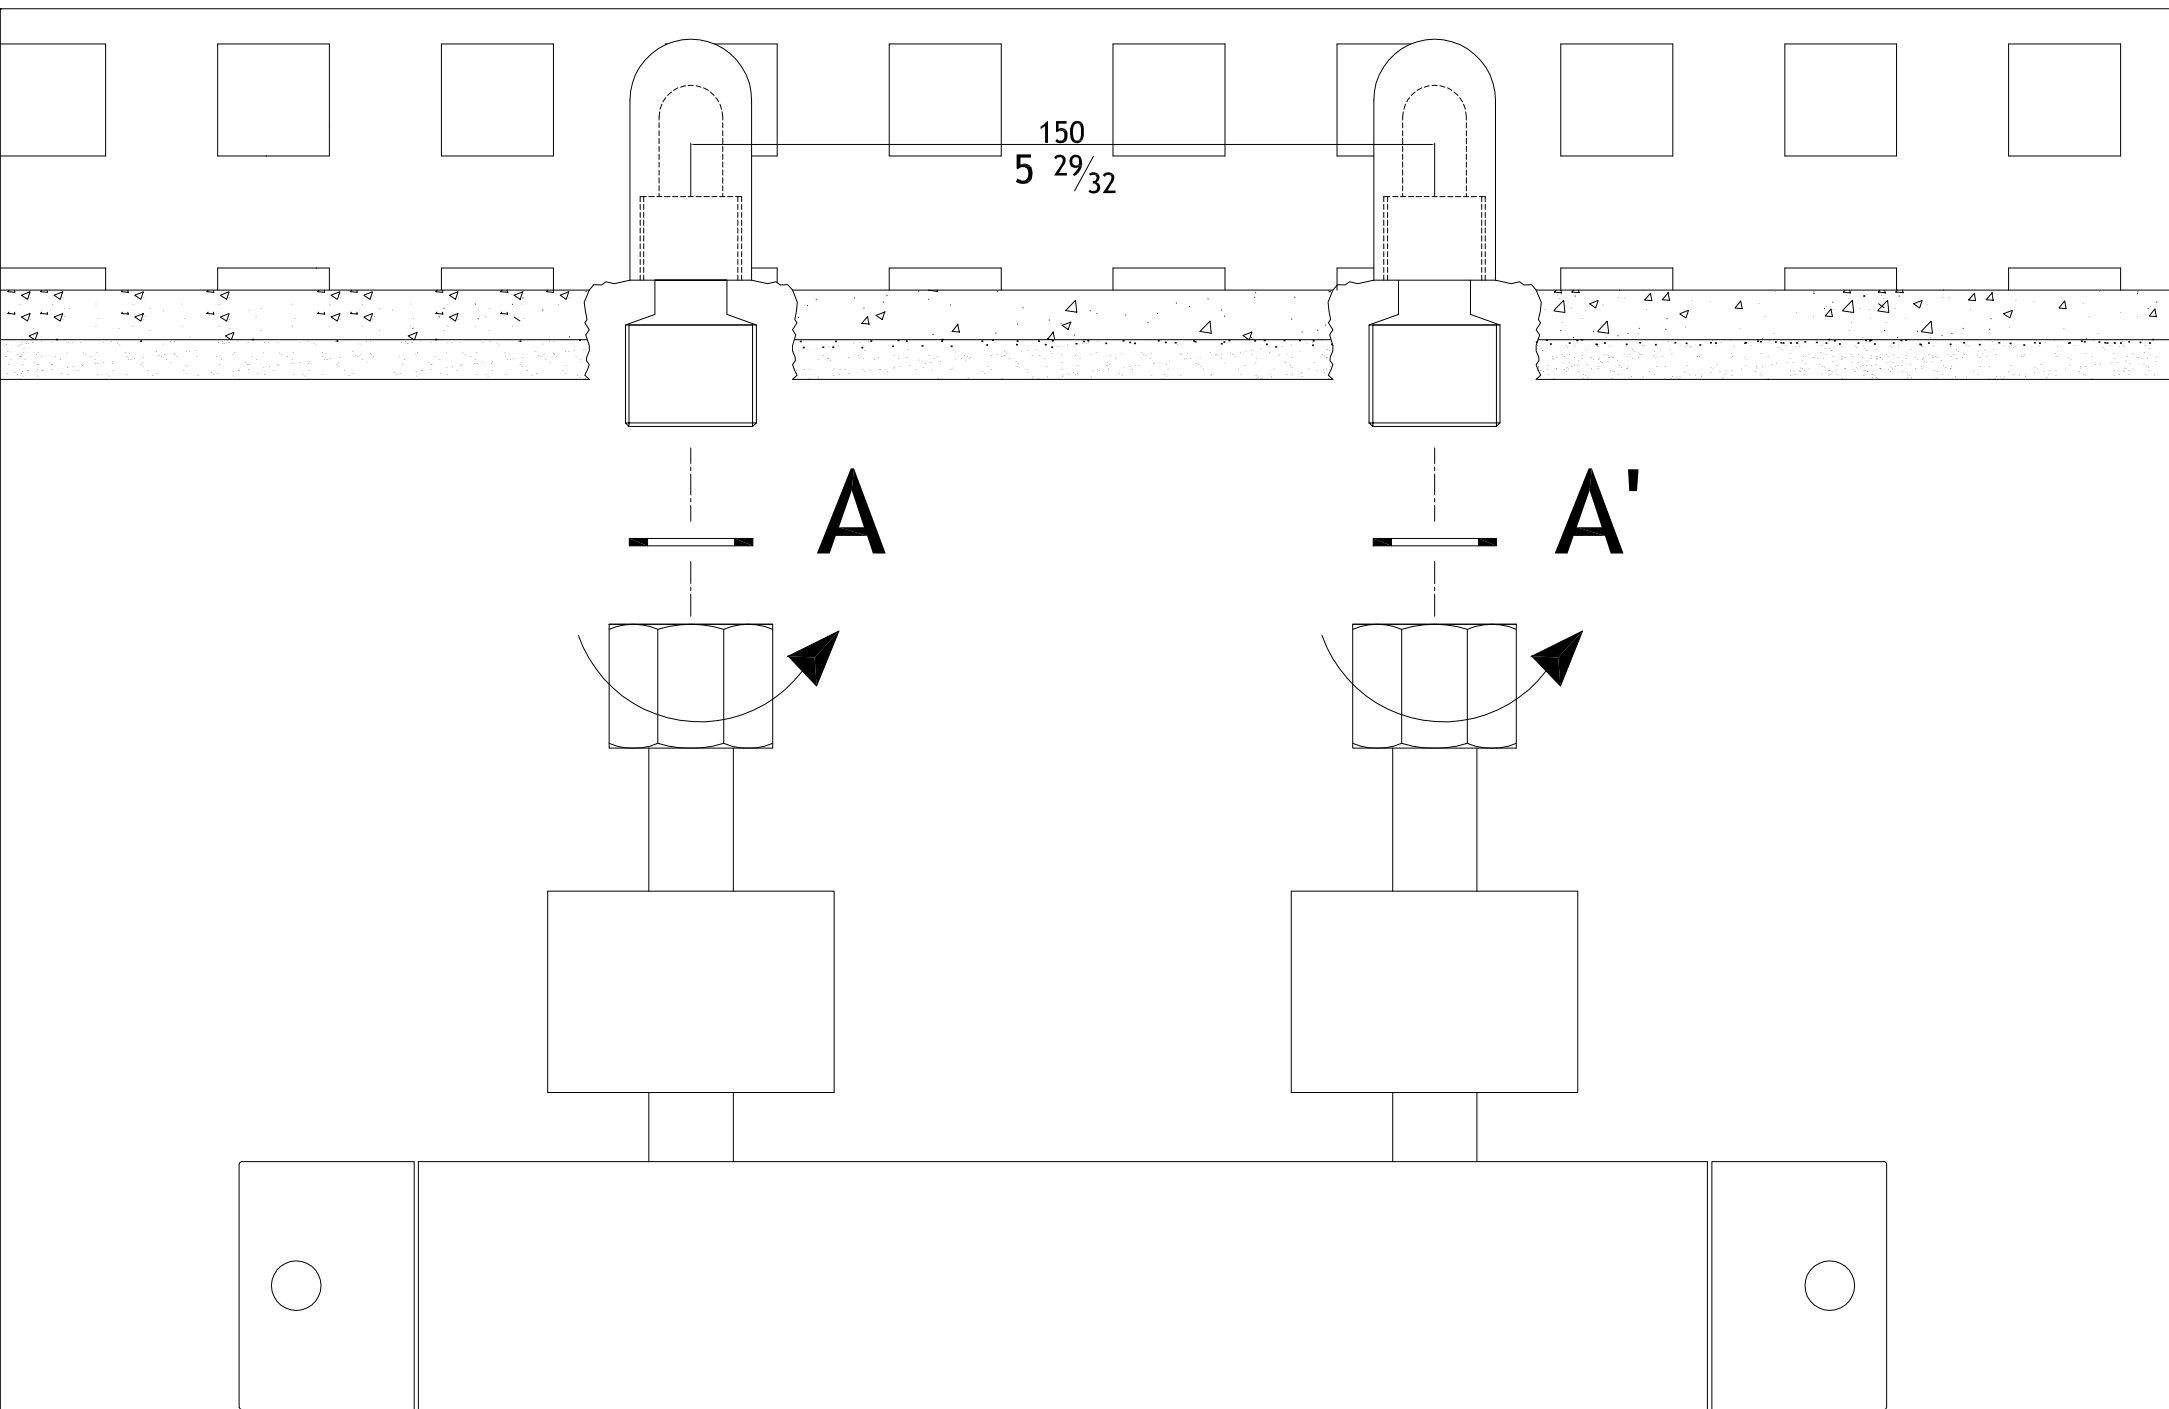


SCANSIONE MINIMA E MASSIMA CONSENTITA SULL' ATTACCO DI RETE  
 MIN - MAX RANGE BETWEEN MAINS

FIG. 1



**FIG. 2**

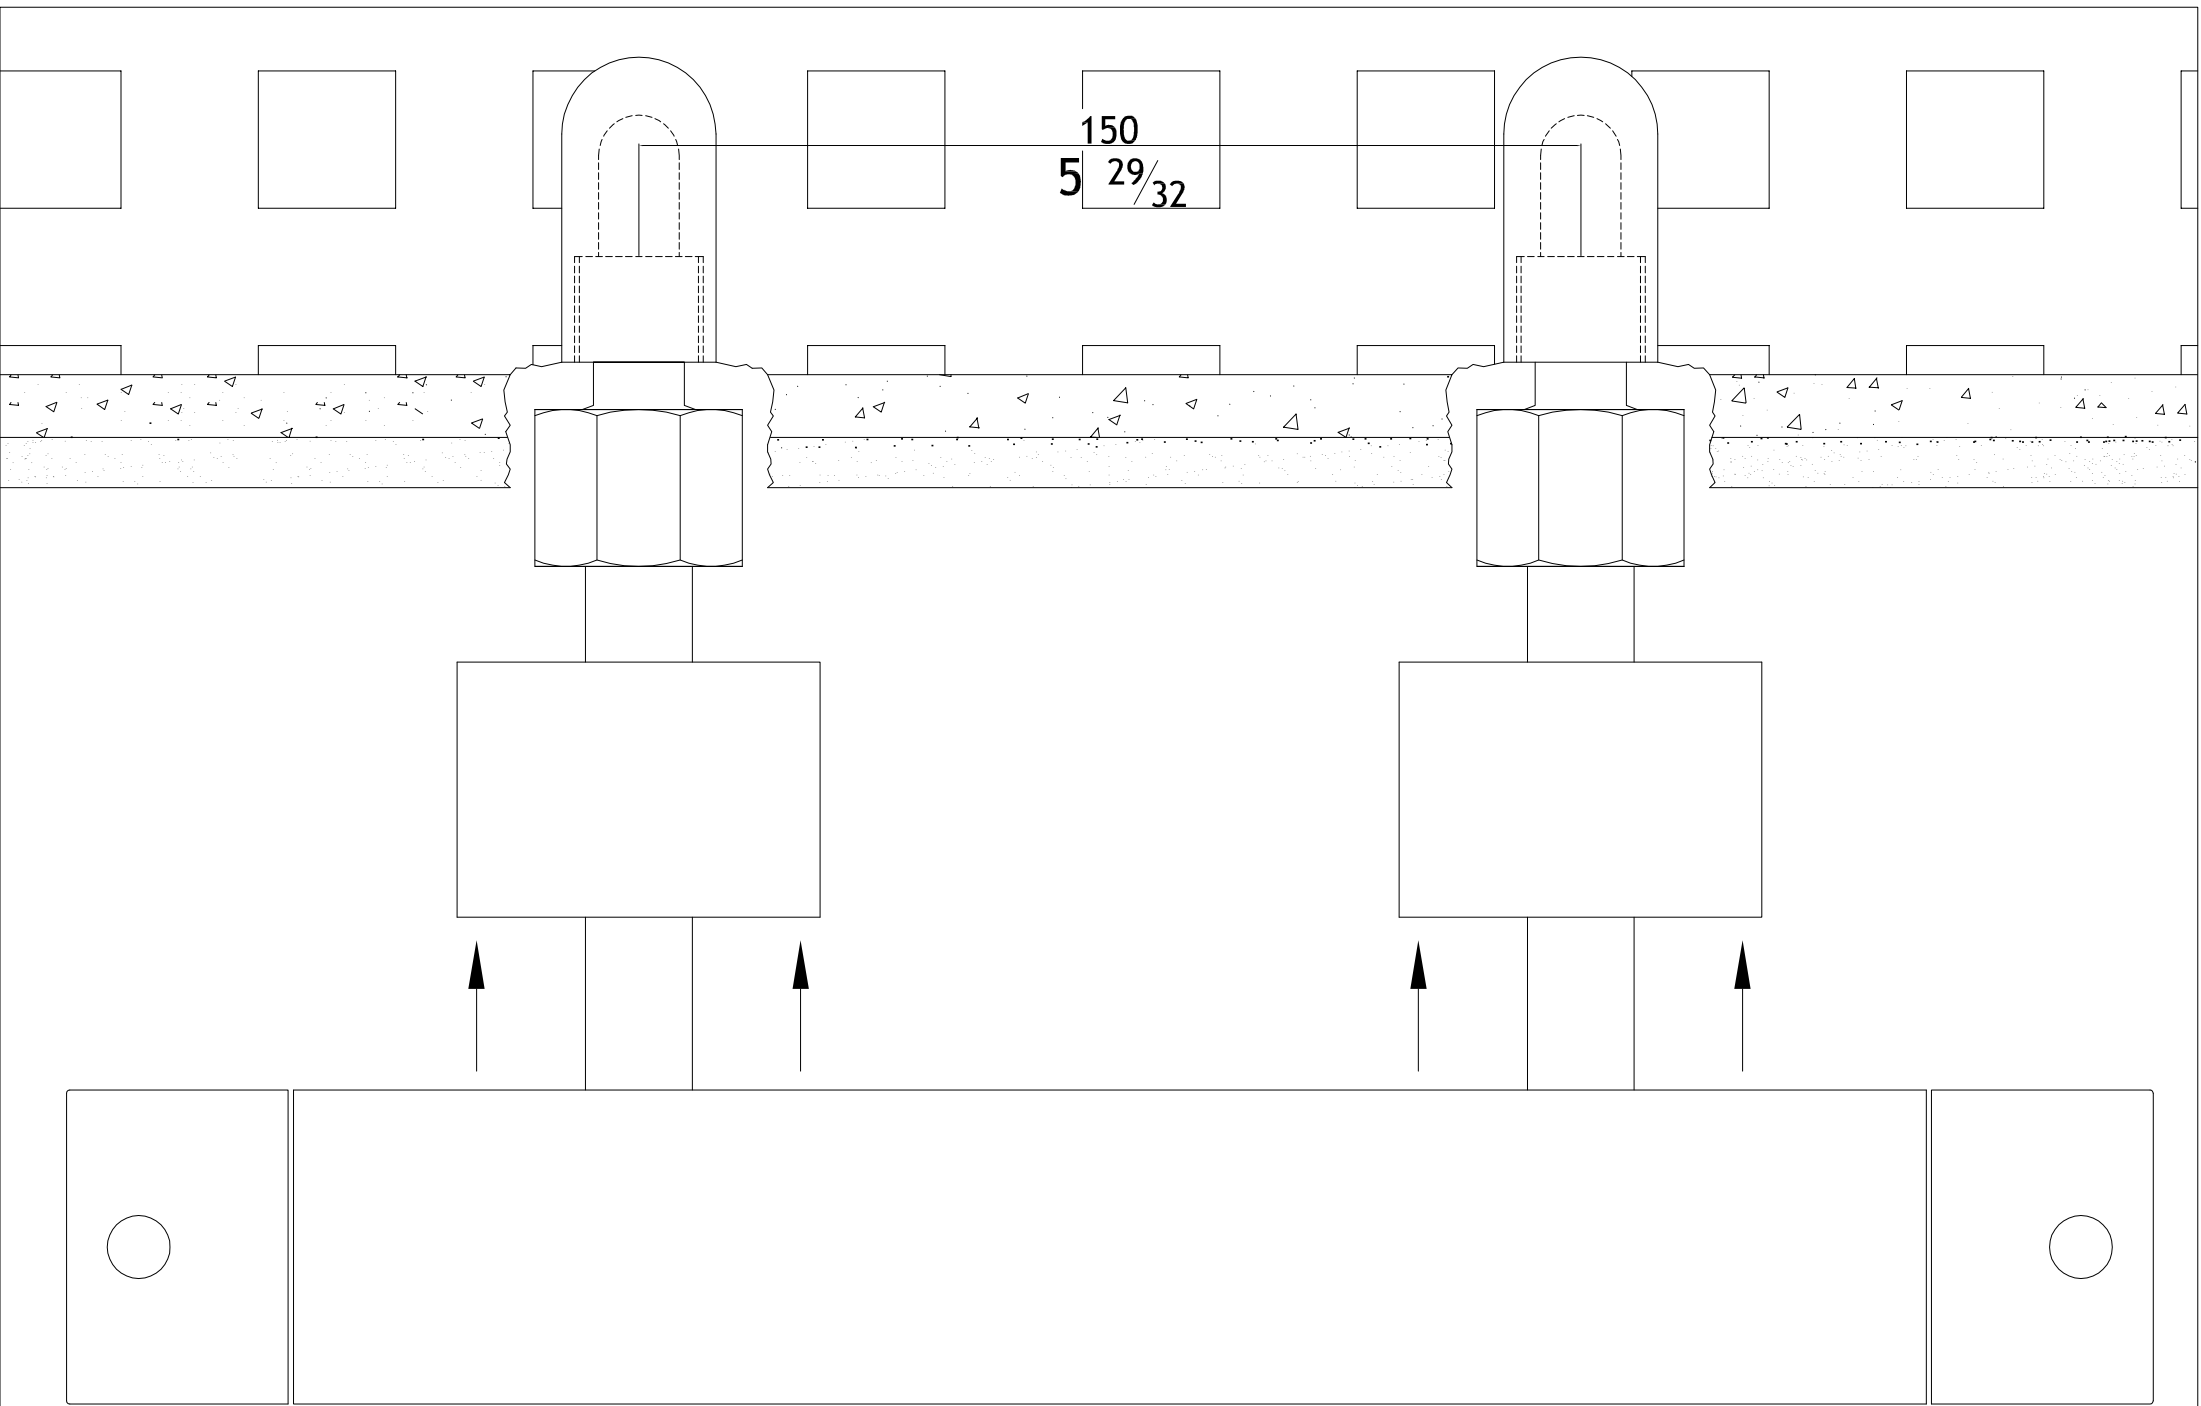


FIG. 3



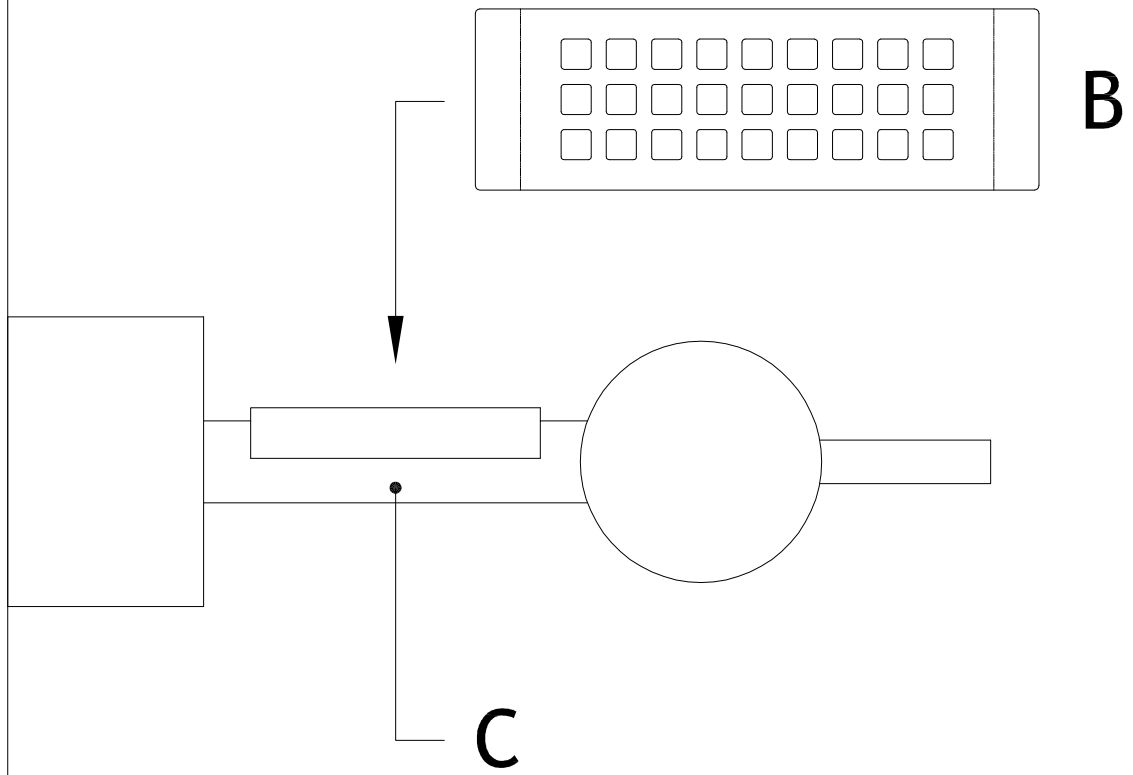


FIG. 4

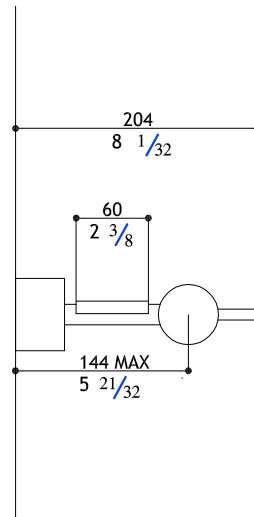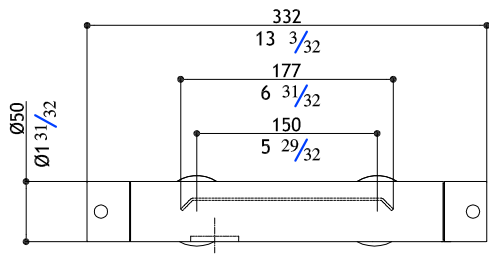

## **ASSEMBLY INSTRUCTIONS BATH-SHOWER MIXER**

---

**u.s.w. 95.202.60.0**

### **FITTING MIXER TO THE WALL**

(FIG 1)

- Check that the horizontal position of the mains ranges between 136 mm (5" 11/32) and 162 mm (6" 3/8) and secure the 2 enclosed eccentrics to the mains for obtaining 150 mm (5"29/32) wheel base.

(FIG 2)

- Tighten the two nuts ESA 30 to the eccentrics after positioning gaskets (A-A').
- Check water tightness and correct horizontal position of the mixer.
- Adjust eccentrics when needed.

(FIG 3)

- Push trim rings to the wall taking care of not scratching the mixer arms.

### **SOAP DISH**

(FIG 4)

- Place soap dish (B) onto arms (C).